

ATTORNEY DOCKET NO.: 040894-5574

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Commissioner for Patents
BOX PATENT APPLICATION
Washington, D.C. 20231

**TRANSMITTAL FOR A NEWLY EXECUTED ORIGINAL APPLICATION
UNDER 37 C.F.R. §1.53(b)**

This is a request for filing a patent application under 37 C.F.R. §1.53(b) for:

Inventors: Manabu AKAMATSU, Kenichi TAKAHASHI and Yoshinori AWATA

For: IMAGE PROCESSING SYSTEM AND METHOD, AND
IMAGE FORMING APPARATUS

1. This is a new ☒ **Utility** ☐ **Design** ☐ **Plant** patent application.
2. The papers enclosed to obtain a filing date are as follows:
 - 43 Pages of Specification including
 - 0 Title Page
 - 7 Pages of Claims
 - 1 Page of Abstract
 - 18 Sheets of drawings containing 22 Figures
 - ☐ The enclosed drawing(s) are photograph(s), and there is also attached a
PETITION TO ACCEPT PHOTOGRAPH(S) AS DRAWING(S)
3. Combined Declaration and Power of Attorney
 - ☒ Enclosed and is executed by all inventors.
 - ☐ Not Enclosed.

This application is being filed under the provisions of 37 C.F.R. §1.53(f).
Applicant(s) await notification from the Patent and Trademark Office of the time
set for filing the Declaration and paying the filing fees.

4. Language

- ☒ English
☐ Non-English

This application is being filed in accordance with 37 C.F.R. §1.52(d) and §608.01 of the MPEP. Applicant(s) await notification from the Patent and Trademark Office of the time set for filing the verified English translation and the processing fee.

5. Assignment

- ☒ An assignment of the invention to Fuji Xerox Co., Ltd. and a PTO Form-1595, Recordation Form Cover Sheet, are enclosed.

☐ An assignment will be filed at a later date.

6. Priority - foreign applications under 35 U.S.C. §119(a)-(d) or §365(b) or PCT international applications under 35 U.S.C. §365(a) designating at least one country other than the U.S.

☒ Priority of the following foreign application is claimed:

Country	Application No.	Filed
Japan	2000-006395	January 14, 2000

Certified copy: ☐ is/are attached. ☒ will follow.

7. Priority based on provisional application(s) - 35 U.S.C. §119(e)

☐ Priority of the following provisional application(s) is claimed:

Application No.	Filed

A. Relate Back - 35 U.S.C. §119(e)

☐ Amend the specification by inserting before the first line the sentence:
 "This application claims priority of copending provisional application(s)
 No. _____ filed on _____."

8. Small entity status

☐ A statement claiming small entity status under 37 C.F.R. §§1.9 and 1.27 is enclosed.

9. Fee Calculation (37 C.F.R. §1.16)

CLAIMS FOR FEE CALCULATION				
	Number Filed	Number Extra	at Rate of	Basic Fee Utility \$690.00 Design \$310.00
Total Claims (37 C.F.R. §1.16(c))	27 - 20 =	7	\$ 18.00 each=	\$126.00
Independent Claims (37 C.F.R. §1.16(b))	2 - 3 =	0	\$ 78.00 each=	\$0.00
Multiple dependent claim(s), if any (37 C.F.R. §1.16(d))			\$260.00	+260.00
SUB-TOTAL =				\$1076.00
Reduction by 1/2 for filing by a small entity				- \$
TOTAL FILING FEE =				\$1076.00

10. Fee Payment

☐ Not Enclosed. **NO FEE IS BEING PAID BY CHECK OR DEPOSIT ACCOUNT AT THIS TIME.**

This application is being filed under the provisions of 37 C.F.R. §1.53(f).
 Applicant(s) await notification from the Patent and Trademark Office of the time set for filing the Declaration and paying the filing fees.

[X] Enclosed.

Two checks in the amounts of \$ 1076.00 and \$40.00 representing the basic filing fee of \$690.00, additional claims fee of \$386.00 and an assignment recording fee of \$40.00 are enclosed.

11. [X] **Except** for issue fees payable under 37 C.F.R. §1.18, the Commissioner is hereby authorized by this paper to charge any additional fees during the entire pendency of this application including fees due under 37 C.F.R. §§1.16 and 1.17 which may be required, including any required extension of time fees, or credit any overpayment to Deposit Account 50-0310. This paragraph is intended to be a **CONSTRUCTIVE PETITION FOR EXTENSION OF TIME** in accordance with 37 C.F.R. §1.136(a)(3).

12. Additional papers enclosed:

- [] Preliminary Amendment
- [X] Information Disclosure Statement
- [X] Form PTO-1449, 2 documents included
- [] Declaration of Biological Deposit
- [] Submission of "Sequence Listing", computer readable copy and/or amendment pertaining thereto for biotechnology invention containing nucleotide and/or amino acid sequence.

Please accord this application an application number and filing date.

Respectfully submitted,

MORGAN, LEWIS & BOCKIUS LLP

William O. Trousdell

William O. Trousdell

Reg. No. 38,637

Dated: September 11, 2000

Customer No. 009629

MORGAN, LEWIS & BOCKIUS LLP

1800 M Street, N.W.

Washington, D.C. 20036

(202) 467-7000

IMAGE PROCESSING SYSTEM AND METHOD, AND IMAGE FORMING APPARATUS

BACKGROUND OF THE INVENTION

The present invention relates to an image processing
5 system and method for detecting a specific pattern from the
image data, which is read out every pixel from an original
document image by an image input device, or the image data
received from communication means, and an image forming
apparatus.

10 Recently, an illegal copying preventing system is
proposed and applied to image forming apparatuses, such as
full-color copying machines. In the system, specific patterns,
e.g., two-dimensional codes, are buried in books, important
documents, securities or the like. The system recognizes this
15 pattern to prevent the illegal copying of those books or the
like, or the illegal use of them.

Generally, the copying machine reads image information
on an original document located at a given position, and copies
it at the size of the original or at a magnification level set
20 by the user. Accordingly, the unit for recognizing the
specific pattern in the copying machine can easily recognize
whether or not input image data has been magnified, and when
it is magnified, recognize a magnification level at which the
input image data has been increased in size, and hence it can
25 carry out a discriminating process on the basis of the

magnification information.

00750" 09555560

A printer, unlike the copying machine, is connected to an external machine, e.g., a personal computer (abbreviated simply as a PC), and receives image data to be output from the external machine. Let us consider a case where an original document containing a specific pattern buried therein in advance is read by an image reader, such as a scanner, the image data read out is loaded into the memory of the PC, the image data is magnified by several %, and the resultant data is sent to the printer. In this case, a magnification of the image data is unknown to the pattern recognizing unit in the printer. Therefore, the pattern recognizing unit will mistakenly judge that the specific pattern in the magnified image data is different in size from the specific pattern to be detected, and will fail to recognize the specific pattern of the magnified image data as the specific pattern to be detected.

To prevent such a pattern recognition failure in advance, there are known magnification-estimating techniques, which are employed for an image recognition device for recognizing the specific pattern (the Unexamined Japanese Patent Application Publication No. Hei 9-81729 and the Unexamined Japanese Patent Application Publication No. Hei 10-126614). The technique disclosed in the publication of the Unexamined Japanese Patent Application Publication No. Hei 9-81729 uses a plurality of matching reference images, such as an image

having an average or typical characteristic of a specific pattern to be recognized, an image having a maximum characteristic, and an image having a minimum characteristic. The technique carries out a process of matching of an object image to be matched against the reference images to obtain a position where a peak degree of matching and degrees of matching of the object image. The technique carries out an interpolation process using the results of the matching process to produce a magnification of the object image.

10 The technique of the publication of the Unexamined Japanese Patent Application Publication No. Hei 10-126614 first detects a given mark contained in input image data, and then estimates a magnification given to the input image data on the basis of the size of the mark. The technique carries out a process of normalizing the input image on the basis of the estimated magnification, and compares the result of the normalization with reference data to discriminate whether or not an object image is contained in the input image.

20 The technique of the publication of the Unexamined Japanese Patent Application Publication No. Hei 9-81729 cannot handle the object images of patterns other than a circular pattern, however. There are cases that a pattern of the object image is not circular, that the object image is circular in pattern but the area within the circular contour contains complex patterns, and that an image intentionally rotated is

input. To cope with such, a matching process is needed for the rotated image. To realize the matching process for the rotated image by a hardware technique, a circuit for executing the matching process will be large in circuit scale. To
5 realize the matching process for the rotated image by a software technique, a fairly large amount of calculations will be required.

In the technique of the publication of the Unexamined Japanese Patent Application Publication No. Hei 10-126614, as
10 described above, complicated steps are required for the process to judge whether or not an object image is contained in the object image. Accordingly, the technique needs a complex process.

Further, to judge whether or not an object image is
15 present in the input image, the input image or the image internally processed is temporarily stored in a memory. To this end, a large memory will be used indispensably.

SUMMARY OF THE INVENTION

20 Accordingly, an object of the present invention is to provide an image processing system and method which can discriminate a specific pattern to be recognized in an input image whose magnification is unknown, by use of a less amount of memory, and simple construction and process, and an image
25 forming apparatus for making an image containing a specific

pattern invalid.

The present invention provides an image processing system for processing an input image containing an object image of a predetermined pattern which may have been magnified, the
5 image processing system, as shown in Fig. 21, comprising:

one or more characteristic quantity computing means for computing a characteristic quantity representative of a characteristic of an object image possibly contained in an input image; and

10 a plurality of magnification estimating means for computing a magnification on the basis of one or more characteristic quantities computed by and output from the one or more characteristic quantity computing means. The image processing system further comprises judging means for judging
15 whether or not the object image is present in the input image, from the plurality of magnification levels estimated by the plurality of magnification estimating means. With this feature, even in a case where an object image having been magnified is contained in the input image, the image processing
20 system reliably detects the object image.

In the image processing system, the judging means, as shown in Fig. 22, may judge whether or not the object image is present in the input image, from one or more characteristic quantities computed by the one or more characteristic quantity
25 computing means and a plurality of magnification levels

estimated by the plurality of magnification estimating means.
With this feature, even in a case where an object image having
been magnified is contained in the input image, the image
processing system reliably detects the object image.

5 The image processing apparatus or method thus
constructed may be incorporated into an image forming
apparatus. When an object image is present in the input image
data, the image forming apparatus reliably is capable of making
the image data invalid.

10 Thus, the image forming apparatus can exactly judge
whether or not the object image is present even if it has been
magnified. Accordingly, the image forming apparatus can
reliably make the image data containing the object image
invalid.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is an explanatory diagram showing an object image
to be recognized in the embodiments of the present invention.

20 Fig. 2 is a block diagram showing an overall arrangement
of an image processing system which is an embodiment of the
present invention.

Fig. 3 is a table showing a relationship between the size
of the object image having undergone the resolution conversion,
and the magnification.

25 Fig. 4 is a diagram showing a cut-out image area and

characteristic quantity (1) detecting areas for a characteristic quantity (1).

Fig. 5 is a diagram exemplarily showing characteristic quantity (1) detecting areas and magnification estimating areas for extracting characteristic quantities (1A) to (1D).

Fig. 6 is a block diagram showing an exemplar arrangement of magnification estimating means for the characteristic quantities (1A) to (1D).

Fig. 7 is a diagram exemplarily showing an extraction area in extracting a characteristic quantity (2).

Fig. 8 is a table showing relationships between the characteristic quantity (2) and magnification levels.

Fig. 9 is a diagram exemplarily showing an extraction area in extracting a characteristic quantity (3).

Fig. 10 is a table showing relationships between the characteristic quantity (3) and magnification levels.

Fig. 11 is a block diagram showing an exemplary arrangement of the judging means.

Fig. 12 is a general flow chart showing an image processing method according to the present invention.

Fig. 13 is a flow chart showing a process of extracting the characteristic quantity (1).

Fig. 14 is a flow chart showing a process of estimating a magnification on the basis of the characteristic quantity (1).

Fig. 15 is a flow chart showing a process of extracting the characteristic quantity (2).

Fig. 16 is a flow chart showing a for estimating a magnification on the basis of the characteristic quantity (2).

5 Fig. 17 is a flow chart showing a process for estimating a magnification on the basis of the characteristic quantity (2).

Fig. 18 is a flow chart showing a process for extracting the characteristic quantity (3).

10 Fig. 19 is a flow chart showing a synthetic judging process.

Fig. 20 is a block diagram showing an image forming apparatus which is an embodiment of the present invention.

15 Fig. 21 is a block diagram showing an overall arrangement of the image forming apparatus.

Fig. 22 is a block diagram showing another overall arrangement of the image forming apparatus.

DETAILED DESCRIPTION OF THE PREFERERED EMBODIMENTS

20 An image to be recognized in an embodiment of the present invention is an object image shown in Fig. 1. The object image designated by reference numeral 1 consists of a circle and patterns located within the circle. The diameter of the circle of the object image is 10mm in a state that the object image
25 is not magnified or its magnification is 100%. It is readily

understood that the object image 1 is not limited to the illustrated one but its shape and size are appropriately selected upon occasion.

Fig. 2 is a block diagram showing an overall arrangement of an image processing system which is an embodiment of the present invention. In the figure, reference numeral 2 is specific color extracting means; 3 is resolution converting means; 4 is window processing means; 51 to 53 are characteristic quantity computing means 61 to 63 are magnification estimating means; and 7 is judging means.

The specific color extracting means 2 extract only a preset color from an input image. The resolution converting means 3 reduces a resolution of the input image from which the specific color was extracted by the specific color extracting means 2. In a specific example, the resolution converting means 3 is capable of reducing 600dpi of the input image to about 100dpi. Where the resolution is converted into 100dpi, the diameter of the object image 1 is 40 dots when the magnification is 100%.

With provision of the specific color extracting means 2 and the resolution converting means 3, the image data to be processed may be reduced in size. The size reduction of the image data will lessen the load in the subsequent process. If required, the specific color extracting means 2 and/or resolution converting means 3 may be omitted, as a matter of

course.

The window processing means 4 sequentially cuts a predetermined image area out of the image of which the resolution was reduced by the resolution converting means 3, and produces cut-out image areas. Fig. 3 is a table showing a relationship between the size of the object image 1 having undergone the resolution conversion, and the magnification. In case that an input image of 600dpi in resolution, which contains an object image 1 not magnified, is input to the image processing system, and that the resolution of the input image is converted into 100dpi, the object image 1 takes the form of a circle of about 40 dots in diameter.

When an input image containing the object image 1 having been increased or decreased in size is input to the image processing system, the object image 1 has the diameter which depends on the magnification as shown in Fig. 3. Accordingly, one may determine the size of the cut-out image area, which is cut out by the window processing means 4, while referring to the table.

As seen from the table, when the magnification is 120%, the diameter of the object image 1 is 48 dots. The cut-out image area is selected to have 48 dots x 48 dots. Thus, in this instance, the cut-out image area is a square of 48 x 48. However, the size and shape of the cut-out image area may be appropriately selected as needed. For example, the cut-out

image area may be analogous in shape to the object image 1. In this instance, the magnification is selected to be within a range of 80% to 120%. The magnification varying range may be broader than this range, if required.

5 The characteristic quantity computing means 51A to 51D, and the characteristic quantity computing means 52 and 53 each detect or compute something (referred to merely as "characteristic quantity") representative of a characteristic of the object image 1. In this instance, as will be described later, those characteristic quantity computing means detect or compute a total of six characteristic quantities; peripheral information at four positions as characteristic quantities representing a shape of the object image 1, and ON pixel information and ON/OFF inverse information, which represent the inner patterns of the object image 1. Specifically, the characteristic quantity computing means 51A to 51D detect the peripheral information of the object image 1, the characteristic quantity computing means 52 detects the ON pixel information, and the characteristic quantity computing means 53 detects the ON/OFF inverse information.

20 While six characteristic quantities are detected or computed in this instance, the characteristic quantity may take any form if it represents a characteristic of the object image. The number of the characteristic quantities may also
25 be selected appropriately.

detecting the periphery of the circle as viewed in the fast scan direction. The characteristic quantity 1B detecting area and the characteristic quantity 1D detecting area are used for detecting the periphery of the circle in the slow scan direction.

As seen Fig. 3, the size (diameter) of the object image 1 varies depending on the magnification. Therefore, in each of the characteristic quantity 1A detecting area, characteristic quantity 1B detecting area, characteristic quantity 1C detecting area, and characteristic quantity 1D detecting area, the positions corresponding to the magnification levels, i.e., portions containing numerals in Fig. 5, are assigned to magnification estimating areas (1) to (9), respectively.

In this instance, the magnification estimating area (1) corresponds to the position of 120% of the magnification. Similarly, the magnification estimating areas (2), (3), (4), (5), (6), (7), (8) and (9) correspond to the positions of 115%, 110%, 105%, 100%, 95%, 90%, 85% and 80%, respectively.

Accordingly, when the object image 1 is cut out of the input image by the window processing means 4 where the characteristic quantity 1A detecting area, characteristic quantity 1B detecting area, characteristic quantity 1C detecting area, and characteristic quantity 1D detecting area, and the magnification estimating areas are set up as mentioned

above, the positions on the object image 1 corresponding to magnification levels are extracted in the form of ON pixels.

In this instance, the four characteristic quantity (1) detecting areas for detecting the periphery of the object image 1 are located at four positions in the fast and slow scan directions. Those areas may be located at positions as obliquely viewed, and the number of them may be appropriately selected.

The output signals of the characteristic quantity computing means 51A to 51D are ON pixel information in the magnification estimating areas (1) to (9), which correspond to the magnification levels of the characteristic quantity 1A detecting area, characteristic quantity 1B detecting area, characteristic quantity 1C detecting area, and characteristic quantity 1D detecting area. The magnification estimating means 61 estimates a magnification of the cut-out image area 41 on the basis of the ON pixel information of the characteristic quantity computing means 51A to 51D.

Fig. 6 is a block diagram showing an exemplar arrangement of the magnification estimating means 61. In the magnification estimating means 61, signals output from the characteristic quantity computing means 51A to 51D are input to coincidence computing portions 61A to 61c, respectively. The coincidence computing portion 61A compares the ON pixel information received from the characteristic quantity

computing means 51A to 51D, and checks if those four ON pixel information are coincident with one another. When those information are coincident with one another, the ON pixel information decided to be coincident is output to an valid coincidence-degree select portion 61H.

The computing portion 61B likewise compares the ON pixel information received from the characteristic quantity computing means 51A to 51D, and checks if three of those ON pixel information are coincident with one another. The coincidence computing portion 61C compares the ON pixel information received from the characteristic quantity computing means 51A to 51D, and checks if two of those ON pixel information are coincident with each other.

The detect results by the computing portions 61B and 61C are respectively output to error comparing portions 61D and 61E. Each of the error comparing portions 61D and 61E compute differences or errors between the ON pixel information, which are not coincident, output from the characteristic quantity computing means 51A to 51D and the ON pixel information, which are coincident, output from the same. When the errors are within a preset range in a corresponding error register, when the computed errors are within the preset error range of the error register, the ON pixel information, which are incident, are output from the computing portion 61B and the coincidence computing portion 61C to the valid coincidence-degree select

portion 61H.

More specifically, it is assumed now that an error tolerable range to be set in the error register is $\pm 5\%$. When the ON pixel information output from the characteristic quantity computing means 51A to 51C indicate the position of the magnification estimating area (5), i.e., 100%, and the ON pixel information from the characteristic quantity computing means 51D indicate the position of the magnification estimating area (4), i.e., 105%, the computing portion 61B detects that three pieces of ON pixel information from the characteristic quantity computing means 51A to 51D are coincident with one another, and the error comparing portion 61D compares 100% as the ON pixel information output from the characteristic quantity computing means 51A to 51C with 105% as the ON pixel information from the characteristic quantity computing means 51D. As a result, the error is 5%. As recalled, the error tolerable range set in the error register is $\pm 5\%$. Therefore, 100% as the ON pixel information output from the characteristic quantity computing means 51A to 51C is output to the valid coincidence-degree select portion 61H.

The valid coincidence-degree select portion 61H determines whether or not the results output from the coincidence computing portion 61A, the error comparing portion 61D, and the error comparing portion 61E are valid, and selects the valid result with the aid of a valid

coincidence-degree select register. And it outputs only the valid result to the judging means 7.

Description will now be given about a process of computing the ON pixel information as a characteristic quantity (characteristic quantity (2)), which represents the inner pattern of the object image 1, which the process is carried out by the characteristic quantity computing means 52. A circular area (corresponding to the object image 1 whose magnification is 120%) of 48 dots in diameter, hatched in Fig. 7, is first provided as a characteristic quantity (2) extraction area 42 within a cut-out image area 41 cut out by the window processing means 4. The characteristic quantity computing means 52 counts the ON pixels within the characteristic quantity (2) extraction area 42 for the image within the cut-out image area 41, and outputs the resultant to the are magnification estimating means 62.

The results of counting the number of the ON pixels of the object image 1, which corresponds to the magnification within the characteristic quantity (2) extraction area 42, are shown in Fig. 8. As seen from Fig. 8, the number of the ON pixels within the characteristic quantity (2) extraction area 42 varies depending on the magnification. When the object image 1 is present within the cut-out image area 41, a magnification corresponding to the object image 1 within the cut-out image area 41 cut out by the are magnification

estimating means 62 can be estimated on the basis of the number of ON pixels within the characteristic quantity (2) extraction area 42, which is counted by the characteristic quantity computing means 52.

5 In a process of estimating a magnification corresponding to the object image 1 within the cut-out image area 41, which the process is carried out by the are magnification estimating means 62, the number of ON pixels in the object image 1 corresponding to the magnification levels within the characteristic quantity (2) extraction area 42 as shown in Fig. 10 8 are stored as a dictionary. The magnification is estimated while referring to the dictionary for comparison.

In another magnification estimating process, the image processing system contains a dictionary, which stores the upper limit/lower limit of the number of the ON pixels in the object image 1 corresponding to the magnification within the characteristic quantity (2) extraction area 42. When the number of ON pixels within the characteristic quantity (2) extraction area 42 is between the upper limit/the lower limits 15 corresponding to the magnification, a magnification corresponding to the upper limit/lower limit may be estimated to be a magnification of the cut-out image area 41.

A process of computing ON/OFF inverse information as a characteristic quantity (characteristic quantity (3)), which 25 represents the inner pattern of the object image 1, which the

process is carried out by the characteristic quantity computing means 53, will be described. As in the process of computing the ON pixel information, which is carried out by the characteristic quantity computing means 52, to compute the ON/OFF inverse information, the characteristic quantity (3) extraction area is provided within the cut-out image area 41 cut out by the window processing means 4. The magnification estimating means 63 counts the inverted ON and OFF pixels in the fast and slow scan directions, and outputs the result of the counting to the magnification estimating means 63.

In this instance, two directions, the fast and slow scan directions, are used for the direction to obtain the ON/OFF inverse information. If necessary, one or plural directions may be used for the same purpose. As shown in Fig. 9, ON and OFF pixels in an image of a predetermined shape, such as an ON/OFF extraction area 44, within a characteristic quantity (3) extraction area 43, may be counted.

Fig. 10 is a table showing the results of counting ON/OFF inverse information of the object image 1 corresponding to a magnification when the characteristic quantity (3) extraction area is changed to the characteristic quantity (2) extraction area 42. As seen from the table of Fig. 10, the number of ON/OFF inverse pixels within the characteristic quantity (2) extraction area 42 varies depending on the magnification. When an object image 1 is present within the cut-out image area

41, the magnification estimating means 63 may estimate a magnification corresponding to the object image 1 within the cut-out image area 41 on the basis of the number of ON/OFF inverse pixels within the characteristic quantity (2) extraction area 42, which is counted by the characteristic quantity computing means 53.

A process by which the magnification estimating means 63 estimates a magnification corresponding to the object image 1 within the cut-out image area 41 resembles the magnification estimating process of the magnification estimating means 62.

A block diagram showing an exemplary arrangement of the judging means 7 is shown in Fig. 11. In the judging means 7, magnification information output from the magnification estimating means 61 to 63 are input to coincidence degree computing portions 71 and 72. The coincidence degree computing portion 71 compares the magnification information received from the magnification estimating means 61 to 63, and judges whether or not those pieces of information are coincident with one another. If the information are coincident with one another, the judging means 7 judges that an object image 1 is contained in the cut-out image area 41, and outputs the result of the judgement to a valid coincidence degree select portion 75.

Similarly, the coincidence degree computing portion 72 compares magnification information received from the

00760 0955550
magnification estimating means 61 to 63, and judges whether or not the magnification information output from the magnification estimating means 61 to 63 are coincident with one another, and outputs the result of the judgement to an error comparator portion 73.

The error comparator portion 73 computes an error or difference between the magnification information being not coincident that is output from the magnification estimating means 61 to 63 and the magnification information being coincident that is output from the magnification estimating means 61 to 63. If the computed error is within a tolerable range set in an error register, the judging means judges that the error is within the tolerable range, and that an object image 1 is present within the cut-out image area 41, and outputs the judgement result to the valid coincidence degree select portion 75.

Let us consider a case where the error tolerable range set in the error register is $\pm 5\%$, and the magnification information of the magnification estimating means 61 and 62 is 100% and that of the magnification estimating means 63 is 105%. In this case, the coincidence degree computing portion 72 detects that the magnification information of the magnification estimating means 61 to 63 are coincident with one another. The error comparator portion 73 compares 100% of the magnification information of the magnification

estimating means 61 and 62 with 105% of that of the magnification estimating means 63. As a result, it produces an error of 5%. This figure is within $\pm 5\%$. Therefore, the judging means judges that an object image 1 is present within the cut-out image area 41, and outputs the judgement result to the valid coincidence degree select portion 75.

The valid coincidence degree select portion 75 judges whether or not the processing results output from the coincidence degree computing portion 71 and the error comparator portion 73 are valid and selects only the valid result or results with the aid of a valid coincidence degree select register 76, and outputs the valid result or results.

Fig. 12 is a flow chart generally showing the image processing method of the present invention. An input image is input to the image processing system. Upon receipt of the input image, the image processing system starts an operation of detecting an object image. A step S1 is executed to extract only a predetermined color. A step S2 is executed to convert a resolution of the extracted color data extracted in the step S1 to another resolution. For example, 600dpi is converted into 100dip.

A step S3 is executed to cut out a cut-out image area out of the image data having undergoing the resolution conversion in the step S2. In this case, the size of the cut-out image area cut out is selected so as to allow the object image

1 of the highest magnification level to be detected. In this instance, the size of the cut-out image area is selected to be 48 dots x 48 dots so as to allow the object image 1 of 120% in magnification to be detected.

5 A step S4 is executed to extract a characteristic quantity (1) of the object image 1 within the cut-out image area cut out in the step S3. A step S5 is executed to estimate a magnification on the basis of the characteristic quantity (1) extracted in the step S4. A step S6 is executed to extract 10 a characteristic quantity (2) of the object image 1 within the cut-out image area cut out in the step S3. A step S7 is executed to estimate a magnification on the basis of the characteristic quantity (2) extracted in the step S6.

15 A step S8 is executed to extract a characteristic quantity (3) of the object image 1 within the cut-out image area cut out in the step S3. A step S9 is executed to estimate a magnification on the basis of the characteristic quantity (3) extracted in the step S9. Here, it is assumed that the characteristic quantity (1) contains the characteristic 20 quantities 1A to 1D used in the image processing system of the embodiment. The characteristic quantities (2) and (3) are the characteristic quantities (2) and (3) used in the image processing system of the embodiment.

Fig. 13 is a flow chart showing a process of extracting 25 the characteristic quantity (1), which is executed in the step

S4 in Fig. 12. An operation of extracting the characteristic quantity (1) starts. A step S21 is executed to scan the pixels within the cut-out image area. A step S22 is executed to check if all the pixels have been scanned. If all the pixels are not scanned, a step S23 is executed to scan the subsequent pixels. The scanning operation is repeated till all the pixels are scanned.

After all the pixels with the cut-out image area are scanned, a step S24 is executed to extract the ON information of the pixels in the magnification estimating areas (1) to (9) in the characteristic quantity 1A extraction area (Fig. 5). Steps S25, S26 and S27, respectively, extract the ON information of the pixels in the magnification estimating areas (1) to (9) in the characteristic quantity 1B extraction area, the characteristic quantity 1C extraction area, and the characteristic quantity 1D extraction area (Fig. 5). A step S28 outputs the ON information in the magnification estimating areas in the characteristic quantity 1A extraction area, the characteristic quantity 1B extraction area, the characteristic quantity 1D extraction area, and the characteristic quantity 1C extraction area, and the characteristic quantity 1D extraction area, which are extracted in the steps S24 to S27, and the process of extracting the characteristic quantity (1) ends.

Fig. 14 is a flow chart showing a process of estimating

a magnification on the basis of the characteristic quantity (1) in the step S5 in Fig. 12. An operation of estimating a magnification on the basis of the characteristic quantity (1) starts. A step S31 is executed to compare the ON pixel information in the characteristic quantity (1) extraction areas A to D, extracted in the step S4 (Fig. 12). When all the comparing results are coincident with one another, a step S38 is executed. When the results are not coincident, a step S32 is executed.

10 When a detection is permitted on the basis of a preset value in the step S32, a step S33 is executed to compare the ON pixel information of the characteristic quantity (1) extraction areas A to D, extracted in the step S4 (Fig. 12). When three comparing results are coincident with one another, 15 a step S34 is executed to check if the area not coincident is within a predetermined tolerable range. When it is within the predetermined range, a step S38 is executed. In other cases, a step S40 is executed. This step judges that the image within the cut-out image area 41 is not the object image 1, from the 20 shape of the object image 1. A step S41 is executed to output information stating that the image within the cut-out image area 41 is not the object image 1, and the process under execution ends.

When three comparing results are not coincident with one 25 another in the step S33, a step S35 is executed. When a

whether or not target pixels to be scanned are present within
a characteristic quantity (2) extraction area 42 (Fig. 7).
When the target pixels are present within a characteristic
quantity (2) extraction area 42, a step S53 is executed to check
5 if the target pixels are the ON pixels.

When the target pixels are the ON pixels in the step S53,
a step S54 is executed to count them and then a step S55 is
executed. When the step S52 judges that the target pixels are
present within a characteristic quantity (2) extraction area
10 42 (Fig. 7), or when the step S53 judges that the target pixels
are not the ON pixels, a step S55 is executed. The step S55
judges whether or not the scanning of the cut-out image area
ends. When the scanning does not end yet, a step S56 is executed
to scan the subsequent pixels, and a sequence of the process
15 from the steps S52 to S55 is repeated. When the step S55 judges
that the scanning of the cut-out image area is completed, a
step S57 is executed to output a count value, and the process
under execution ends.

A process, which is executed in the step S7, for
20 estimating a magnification on the basis of the characteristic
quantity (2) extracted in the step S6, will now be described
with reference to a flow chart in Fig. 16. An operation of
estimating a magnification on the basis of the characteristic
quantity (2) starts. In turn, a step S61 is executed to compare
25 the number of ON pixels in the characteristic quantity (2)

extraction area, extracted in the step S6, with the values in a dictionary as shown in Fig. 8, and judges whether or not those values are coincident with each other.

When those are coincident, a step S62 is executed to judge
5 that the object image 1 is present within the cut-out image area, from the geometrical pattern of the object image 1. A step S63 is executed to output a magnification corresponding to the number of ON pixels, which is coincident in the step S62, and the process under execution ends. When the number
10 of ON pixels in the characteristic quantity (2) extraction area, extracted in the step S6 is not coincident with any of the values in the dictionary as shown in Fig. 8, a step S64 is executed to judge that the object image 1 is not present within the cut-out image area, from the geometrical pattern of the object
15 image 1, and a step S65 is executed to output information stating that the image within the cut-out image area is not the object image 1, and the process under execution ends.

A process for estimating a magnification on the basis of the characteristic quantity (2), which is executed in the
20 step S7 in Fig. 12, may be constructed as in a flow chart shown in Fig. 17. An operation of estimating a magnification on the basis of the characteristic quantity (2) starts. A step S71 is executed. This step compares the number of ON pixels in the characteristic quantity (2) extraction area, extracted in
25 the step S6, with the contents of a dictionary containing the

upper and lower limits of the number of ON pixels in the object image 1, which corresponds to magnification levels in the characteristic quantity (2) extraction area 42. The step S71 judges whether or not a count value is within a threshold value range stored in the dictionary. If it is within the threshold value range, a step S71 is executed to judge that the object image 1 is present within the cut-out image area, from the geometrical pattern of the object image 1, and then a step S73 is executed to output a magnification level corresponding to the threshold value within which the count value falls, and the process under execution ends.

When in the step S71, the number of the ON pixels in the characteristic quantity (2) extraction area, extracted in the step S6, is out of the threshold value range stored in the dictionary, a step S74 is executed to judge that the object image 1 is not present within the cut-out image area, from the geometric pattern of the object image 1, and a step S75 is executed. This step outputs information stating that the that the object image 1 is not present within the cut-out image area 41, and the process under execution ends.

A process, executed in the step S8 (Fig. 12), for extracting the characteristic quantity (3) within the cut-out image area cut out in the step S3 is flow charted in Fig. 18. An operation of extracting the characteristic quantity (3) starts. A step S81 is executed to scan the pixels within

the cut-out image area. A step S82 is then executed to check if the target pixels to be scanned are present within the characteristic quantity (3) extraction area. When the target pixels to be scanned are present within the characteristic quantity (3) extraction area, a step S83 is executed to judge if the target pixels and the pixel preceding to the former as viewed in the fast scan direction are inverted in ON/OFF state.

When the step S83 judges that the target pixels and the pixel preceding to the former as viewed in the fast scan direction are inverted, a step S85 is executed. Similarly, when the target pixels are present within the characteristic quantity (3) extraction area in the step S82, a step S84 judges if the target pixels and the pixel preceding to the former as viewed in the slow scan direction are inverted in ON/OFF state.

When the step S84 judges that the target pixels and the pixel preceding to the former as viewed in the slow scan direction are inverted, a step S85 is executed. The step S85 counts the number of the inverted pixels present as viewed in the fast and slow scan directions. When the step S82 judges that the target pixels are not present within the characteristic quantity (3) extraction area or when the steps S83 and S84 judge that the target pixels and the pixels preceding to the former as viewed in the fast and slow scan directions are not inverted in ON/OFF state, a step S86 is executed.

00160 00550 00430
The step S86 judges whether or not the scanning for the cut-out image area is completed. When not completed, a step S87 is executed to scan the subsequent pixels. A sequence of the process from the steps S82 to S86 is repeated. When the step S86 judges that the scanning of the cut-out image area is completed, a step S88 outputs a count value and the process under execution ends.

A process of the step S9 for estimating a magnification on the basis of the characteristic quantity (3) resembles the process of the step S7 for estimating a magnification on the basis of the characteristic quantity (2). Hence, description of the step S9 process is omitted.

A flow chart showing a synthetic judging process of a step S10 in Fig. 12 is shown in Fig. 19. The synthetic judging process starts. Then, a step S91 compares the magnification levels computed in the magnification estimating steps S5, S7 and S9 for the characteristic quantities (1) to (3). When all the comparing results are coincident with one another, a step S91 is executed. In other cases, a step S92 is executed.

20 When a detection is permitted on the basis of a preset value in the step S92, a step S93 is executed to compare the magnification levels computed in the magnification estimating steps S5, S7 and S9 for the characteristic quantities (1) to (3). When those are coincident with one another, a step S94
25 is executed to check if the area, not coincident, is within

a predetermined error tolerable range. If it is within the tolerable error range, a step S95 is executed. In other cases, a step S97 is executed to judge that the image within the cut-out image area 41 is not the object image 1, and a step S98 is executed to output information stating that the image within the cut-out image area 41 is not the object image 1, and the process under execution ends.

The step S95 judges that the image within the cut-out image area 41 is the object image 1, and the step S96 outputs information stating that the image within the cut-out image area 41 is the object image 1, and the process ends.

Fig. 20 is a block diagram showing an image forming apparatus which is an embodiment of the present invention. In the figure, reference numeral 81 is an image forming apparatus; 82 is a control unit; 83 is an interface; 84 is an image processing unit; 85 is an image forming unit; and 86 is a recognizing unit.

The control unit 82 controls the relative portions for forming an image on a recording medium in accordance with input image data. In particular when the recognizing unit 86 judges that an object image is contained in the image data received by the interface 83, the control unit carries out a process of making the image data invalid.

The interface 83 receives image data from an external device, such as a personal computer. There is a possibility

that an object image, which is inhibited from being visualized, is contained in the image data received. The image data may be the image data of a magnified original image.

The image processing unit 84 carries out a variety of processes for image formation. There is a case that no image processing is required in the image forming apparatus, for example, it receives image data having variously been processed in the external device. In this case, the image processing unit 84 may be omitted.

The image forming unit 85 forms an image on a recording medium. An appropriate method may be used for forming the image. When receiving an invalidating instruction from the control unit 82, it forms an image in accordance with the instruction.

The recognizing unit 86 may employ the above-mentioned unique construction. Specifically, the recognizing unit judges whether or not an object image is present in input image data, and outputs the resultant data to the control unit 82. In this case, even when the input image data has been magnified, the object image can be detected as described above.

An operation of the thus arranged image forming apparatus will be described. The interface 83 receives image data from an external device, such as a personal computer. The image processing unit 84 processes the image data in a predetermined manner. Then, the image forming unit 85 forms an image on a

recording medium. In the operation, the interface 83, the image processing unit 84 and the image forming unit 85 are under control by the control unit 82.

The image data that is received by the interface 83 is also input to the recognizing unit 86. The recognizing unit 86 judges whether or not an object image is present in the input image data, and outputs the resultant data to the control unit 82.

When the recognizing unit 86 judges that the object image is present, the control unit 82 carries out a process of making the input image data invalid. An example of the invalidating process is to generate given data to paint out the whole output image with predetermined color, and the image forming unit 85 forms an image of the generated data. In an alternative, the recognizing unit prohibits the image forming unit 85 from generating the received image data, thereby prohibiting the image formation.

Thus, the image data containing the object image may be controlled so that it is directly used for image formation. In this case, if the image data has been magnified, the magnified image data can reliably be recognized by applying the image processing system of the invention to the recognizing unit 86, and the invalidating process may be carried out.

As seen from the foregoing description, an object image of a specific pattern, even if magnified, can be reliably

detected. Even when the magnified image data is received, the image forming apparatus of the invention recognizes it and carries out the invalidating process.

- said image processing system comprising:

a plurality of magnification estimating means for computing a magnification on the basis of one or more characteristic quantities computed by and output from said one or more characteristic quantity computing means.

- said plurality of magnification estimating means computes said magnification in consideration of an error or errors of one or more characteristic quantities computed by said one or more characteristic quantity computing means.

- judging means for judging whether or not said object image is present in said input image, from said plurality of magnification levels estimated by said plurality of

magnification estimating means.

4. The image processing system according to claim 3, wherein said judging means synthetically judges whether or not said object image is present in said input image in consideration with an error or errors of magnification levels estimated by said plurality of magnification estimating means.

5. The image processing system according to claim 3, wherein said judging means judges whether or not said object image is present in said input image, from one or more characteristic quantities computed by said one or more characteristic quantity computing means and a plurality of magnification levels estimated by said plurality of magnification estimating means.

6. The image processing system according to claim 3, wherein said judging means judges whether or not said object image is present in said input image, from one or more characteristic quantities computed by said one or more characteristic quantity computing means and an error or errors of a plurality of magnification levels estimated by said plurality of magnification estimating means.

7. The image processing apparatus according to claim 1,

further comprising:

specific color extracting means for extracting a specific color from said input image, said specific color extracting means being located at the pre-stage of said characteristic quantity computing means.

8. The image processing apparatus according to claim 1, further comprising:

resolution converting means for converting a resolution of said input image into another resolution, said resolution converting means being located at the pre-stage of said characteristic quantity computing means.

9. The image processing apparatus according to claim 1, further comprising:

window processing means for sequentially cutting predetermined image areas out of said input image, said window processing means being located at the pre-stage of said characteristic quantity computing means.

10. A method of processing an input image containing an object image of a predetermined pattern which may have been magnified,

said image processing system comprising the steps of:
computing means for computing one or more characteristic

quantities representative of a characteristic of an object image possibly contained in an input image; and

estimating a magnification on the basis of one or more characteristic quantities computed by said characteristic quantity computing step.

11. The image processing method according to claim 10, wherein

said magnification estimating step computes said magnification in consideration of an error or errors of one or more characteristic quantities computed by said characteristic quantity computing step.

12. The image processing method according to claim 10, further comprising a step of:

judging whether or not said object image is present in said input image, from said plurality of magnification levels estimated by said magnification estimating process.

13. The image processing method according to claim 12, wherein

said judging step synthetically judges whether or not said object image is present in said input image, in consideration of an error or errors of a plurality of magnification levels estimated by said magnification

estimating step.

14. The image processing method according to claim 12, wherein

said judging step judges whether or not said object image is present in said input image, from one or more characteristic quantities computed by said characteristic quantity computing step and a plurality of magnification levels estimated by said magnification estimating step.

15. The image processing method according to claim 12, wherein

said judging step synthetically judges whether or not said object image is present in said input image, in consideration of one or more characteristic quantities computed by said characteristic quantity computing step and a plurality of magnification levels estimated by said magnification estimating step.

16. The image processing method according to claim 10, further comprising:

a step for extracting a specific color from said input image, said specific color extracting step being performed before said characteristic quantity computing step is performed.

17. The image processing method according to any of claims 10 to 15, further comprising:

a resolution converting step for converting a resolution of said input image into another resolution, said resolution converting step being performed before said characteristic quantity computing step is performed.

18. The image processing method according to claim 10, further comprising:

a window processing step for sequentially cutting predetermined image areas out of said input image, said window processing step being performed before said characteristic quantity computing is performed.

19. An image forming apparatus comprising:

interface means for receiving an image which may have been magnified, from an external device;

image forming means for forming an image on the basis of the image data received by said interface means,

recognizing means for judging whether or not an object image is present in said input image; and

control means for controlling an overall of said image forming apparatus, when said recognizing means judges that said object image is contained in said image data received by

said interface means, said control means making said image data
invalid; wherein

said recognizing means includes said image processing apparatus defined in claim 1.

20. The image forming apparatus according to claim 19,
wherein


said control means performs said image invalidating process such that said control means causes said image forming means to form an image on the basis of predetermined image data and the image data received by said interface means.

21. The image forming apparatus according to claim 19,
wherein

said control means performs said image invalidating process such that said control means inhibits the formation of said received image data.

ABSTRACT OF THE DISCLOSURE

Disclosed is an image processing system for processing an input image containing an object image of a predetermined pattern which may have been magnified, the image processing system. The image processing system comprises: one or more characteristic quantity computing means 51A to 51D, 52 and 53 for computing a characteristic quantity representative of a characteristic of an object image possibly contained in an input image; and a plurality of magnification estimating means 61 to 63 for computing a magnification on the basis of one or more characteristic quantities computed by and output from the one or more characteristic quantity computing means 51A to 51D, 52 and 53.

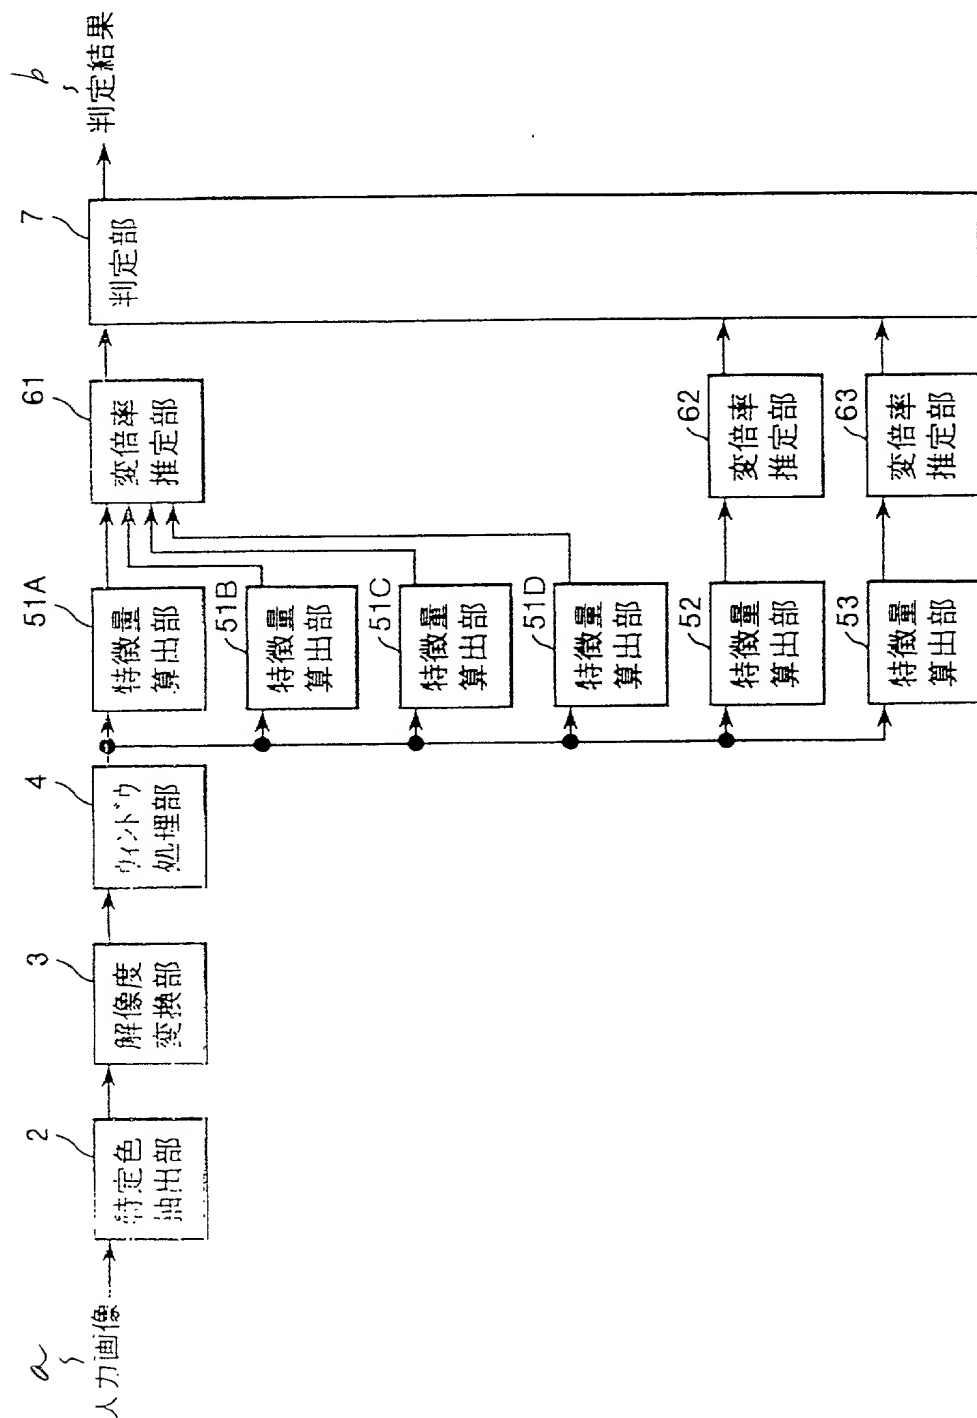~~【图2】~~


【図 3】

Fig. 3

変倍率 (%)	ドット数 (直径)
120	48
115	46
110	44
105	42
100	40
95	38
90	36
85	34
80	32


【図 4】

Fig. 4

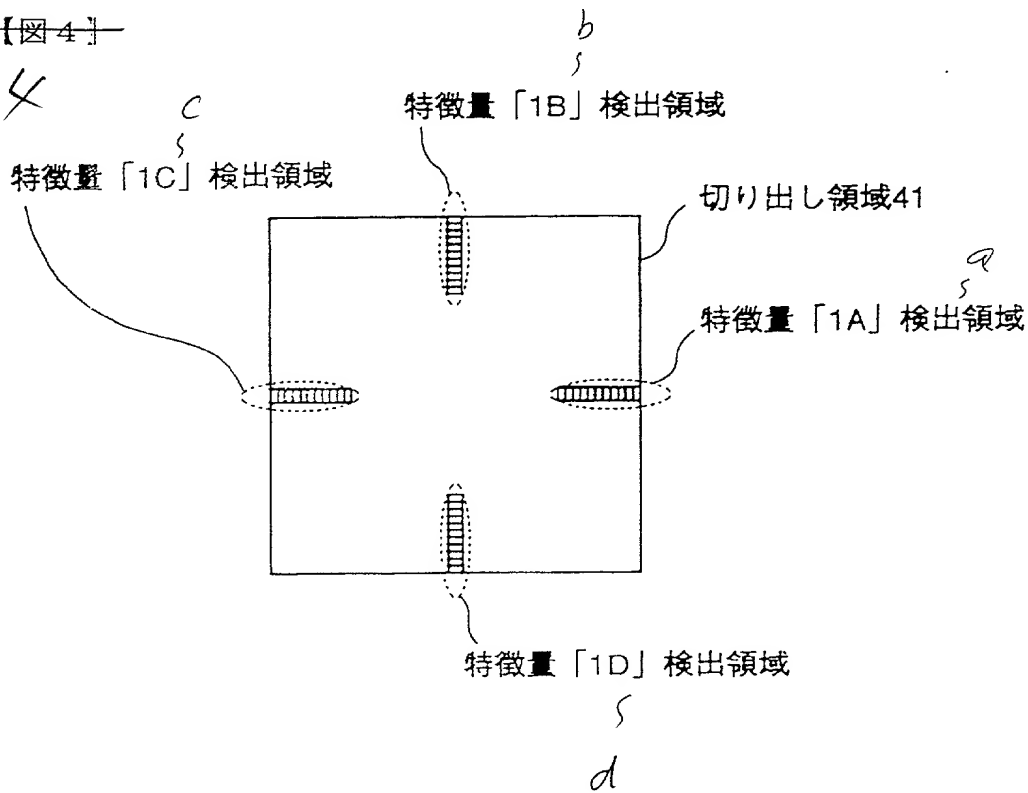


~~【※5】~~

Fig 5

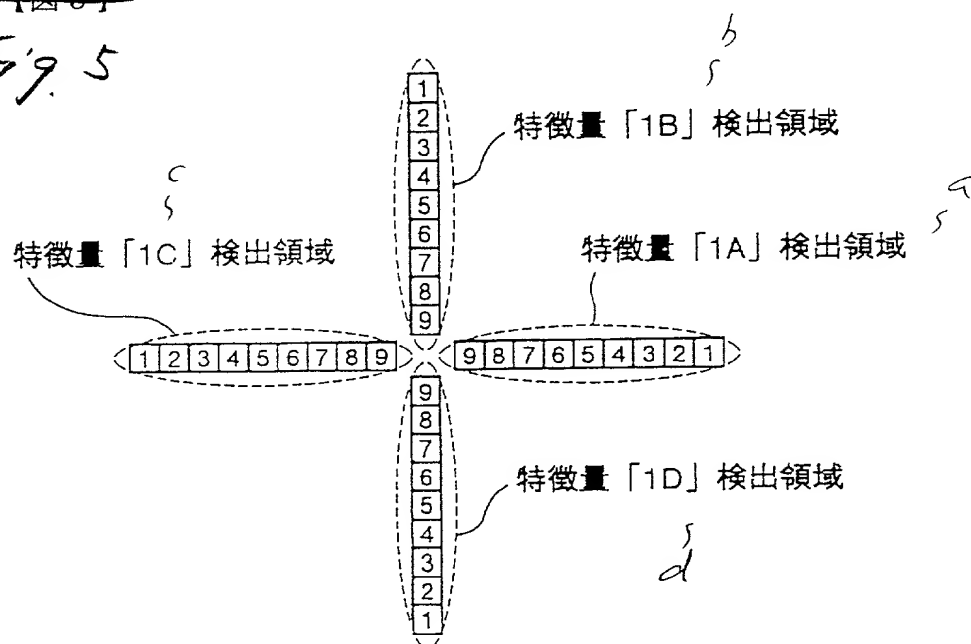


【図 6】

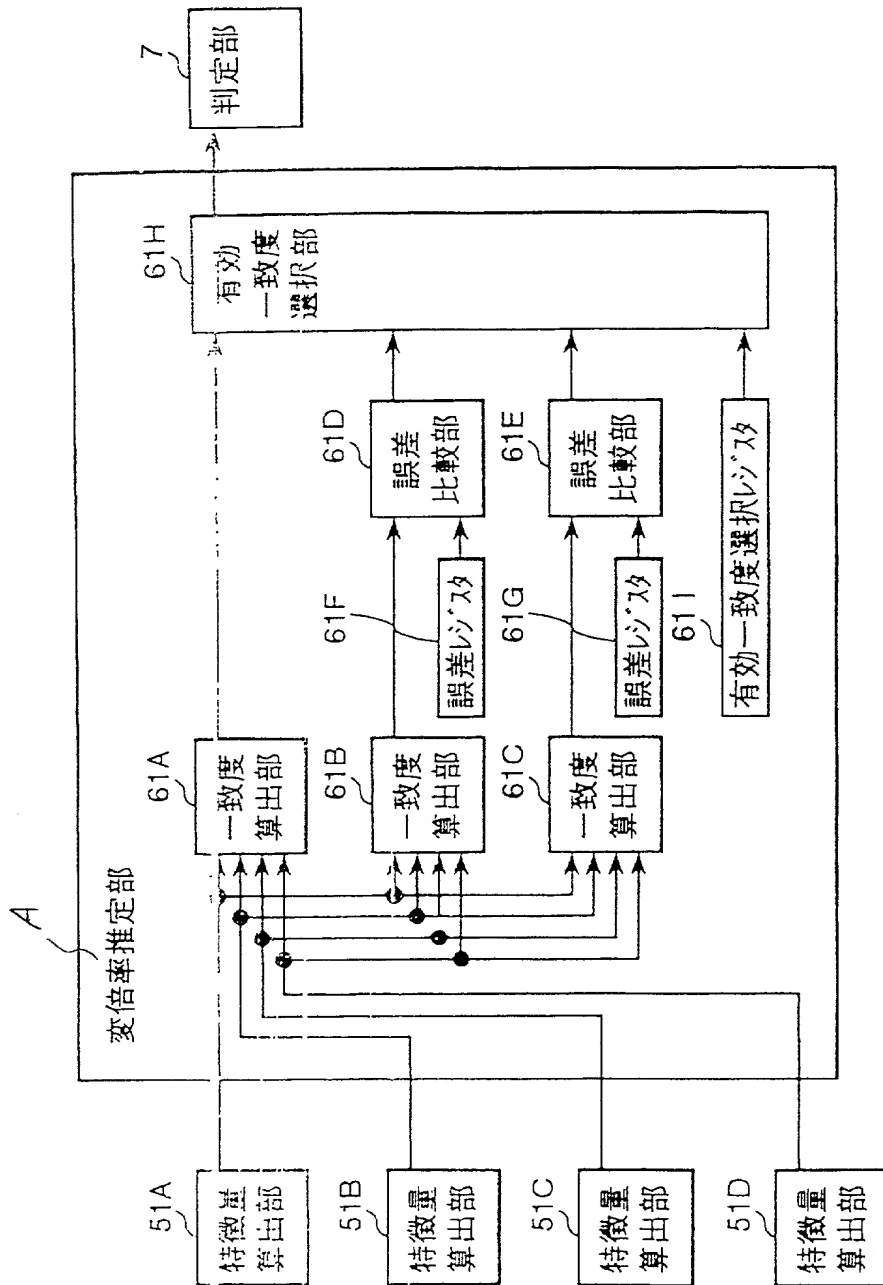

【図 7】

Fig. 7

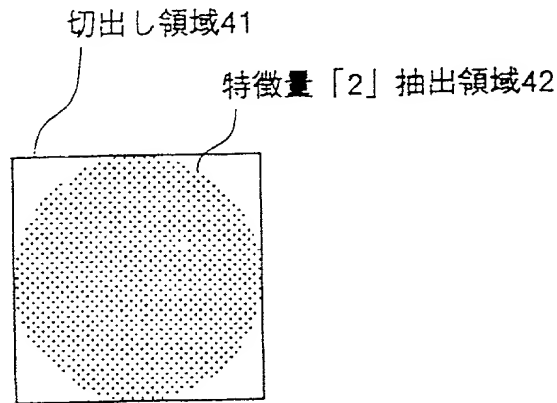


【図 8】

Fig. 8

変倍率 (%) A	ドット数 (ON画素数) B
120	313
115	293
110	261
105	244
100	225
95	208
90	194
85	172
80	152


【図 9】

Fig. 9

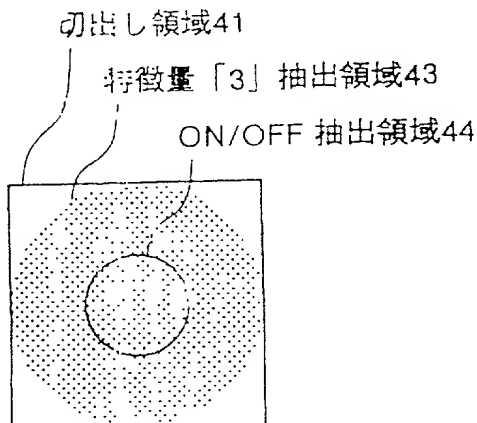

【図12】


Fig. 12

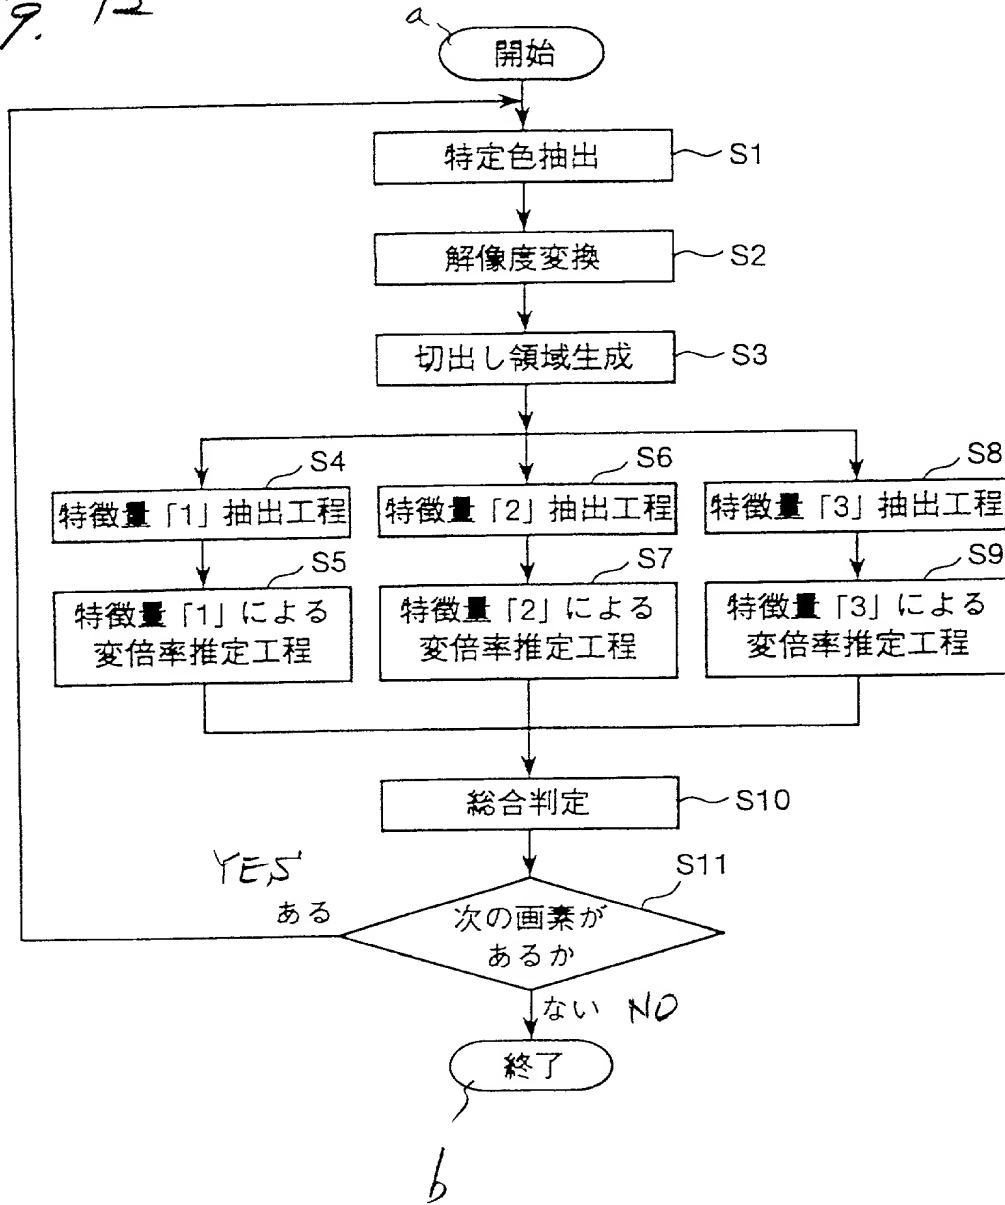

200760-99563950


【図13】

Fig. 13

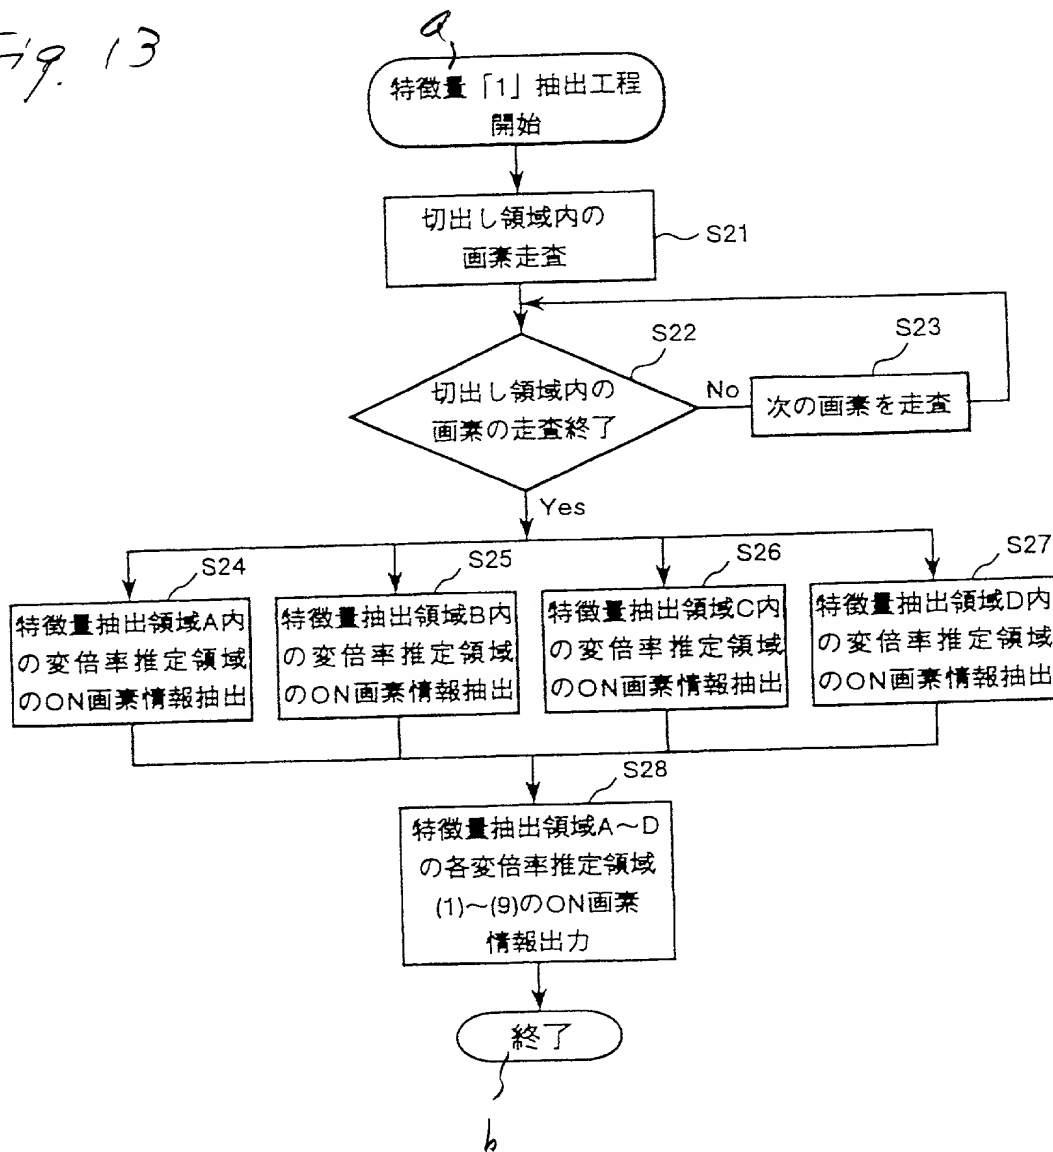


0963956-091100

【図 1 4】 Fig. 14

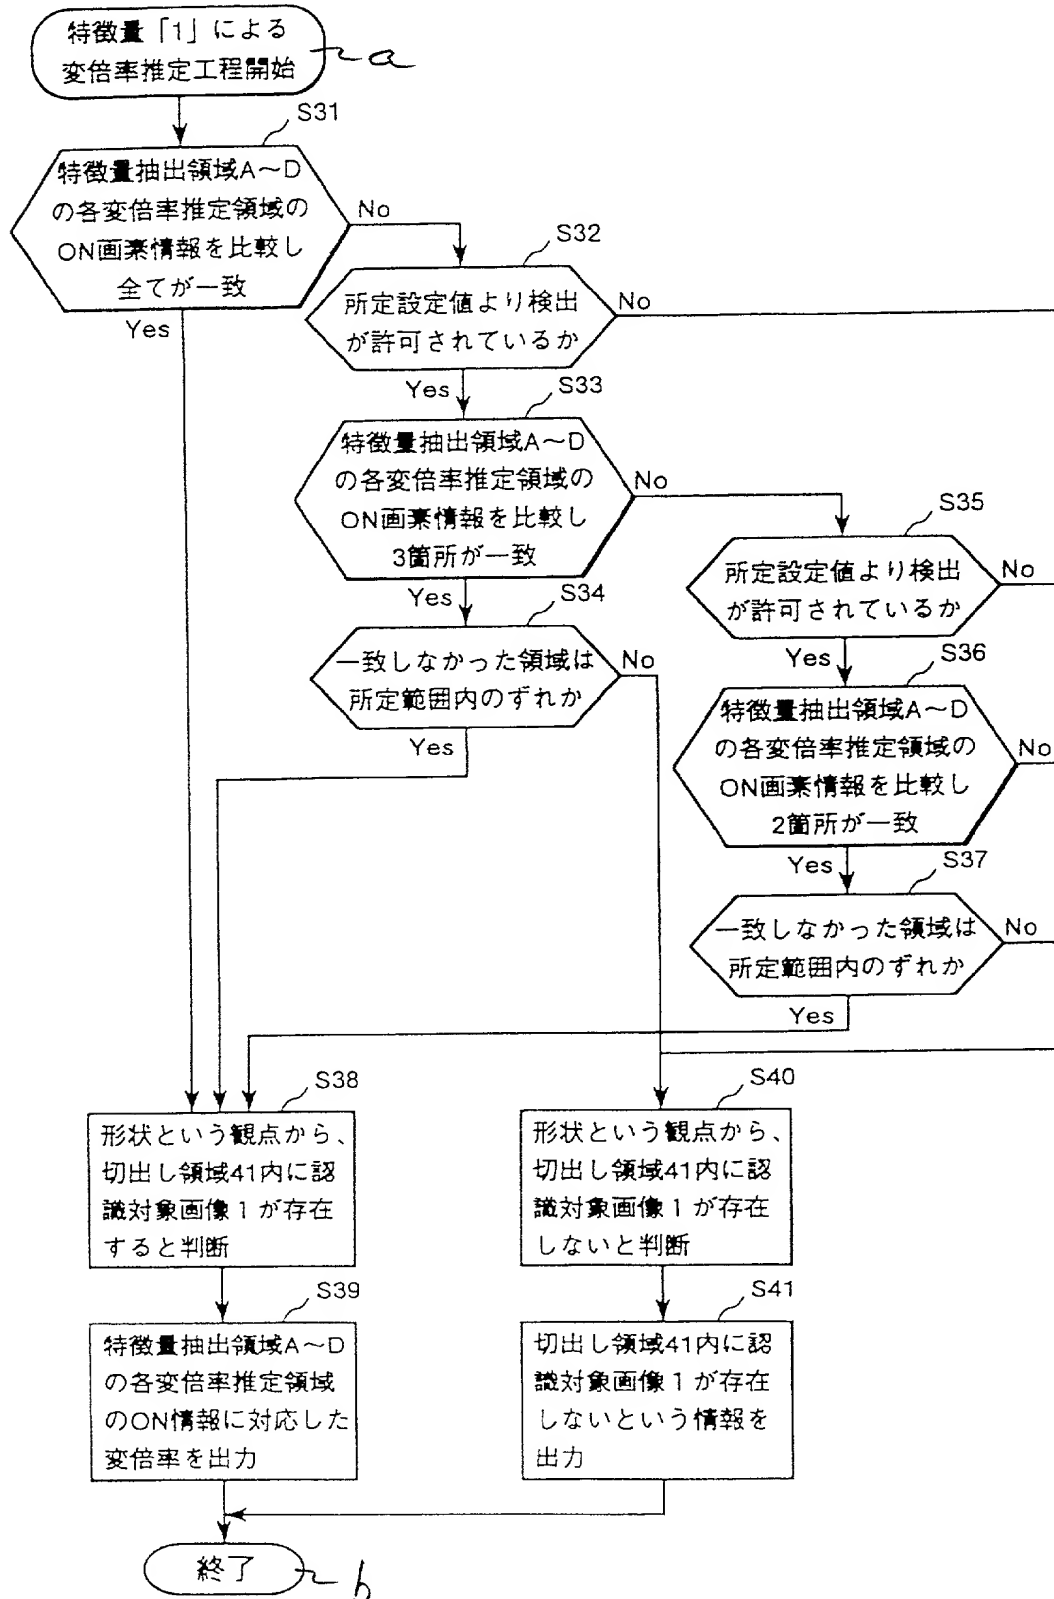

~~整理番号 = FE99-00609~~


~~【図 15】~~ Fig. 15

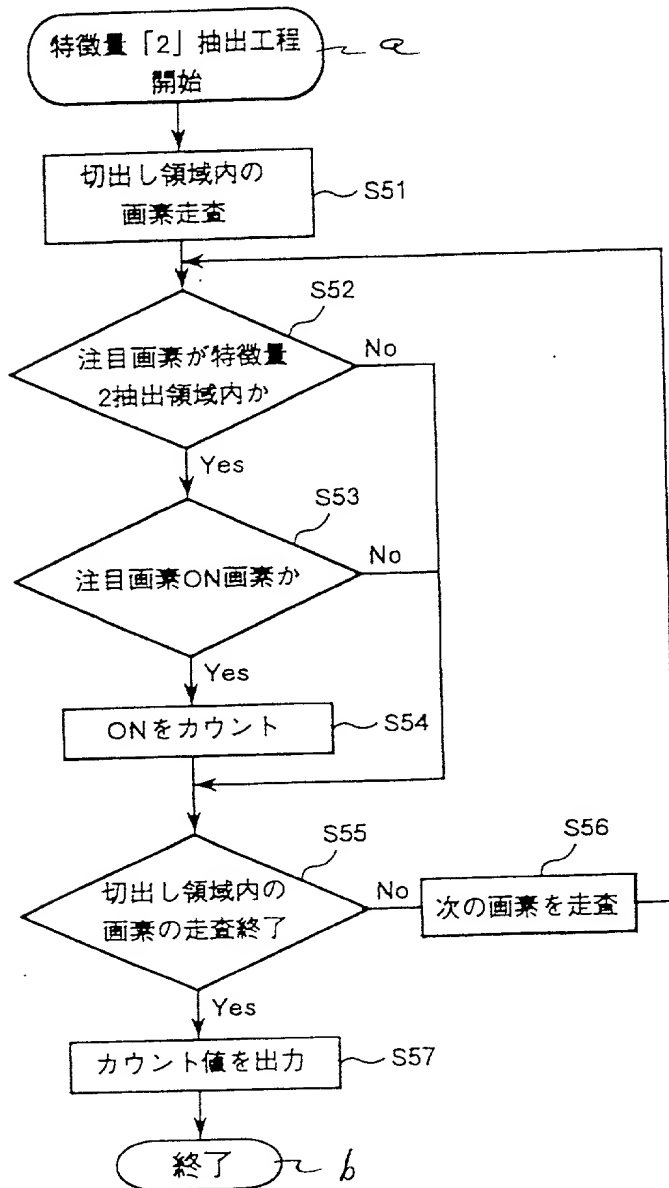

1991
 1992
 1993
 1994
 1995
 1996
 1997
 1998
 1999
 2000
 2001
 2002
 2003
 2004
 2005
 2006
 2007
 2008
 2009
 2010
 2011
 2012
 2013
 2014
 2015
 2016
 2017
 2018
 2019
 2020
 2021
 2022
 2023
 2024
 2025
 2026
 2027
 2028
 2029
 2030
 2031
 2032
 2033
 2034
 2035
 2036
 2037
 2038
 2039
 2040
 2041
 2042
 2043
 2044
 2045
 2046
 2047
 2048
 2049
 2050
 2051
 2052
 2053
 2054
 2055
 2056
 2057
 2058
 2059
 2060
 2061
 2062
 2063
 2064
 2065
 2066
 2067
 2068
 2069
 2070
 2071
 2072
 2073
 2074
 2075
 2076
 2077
 2078
 2079
 2080
 2081
 2082
 2083
 2084
 2085
 2086
 2087
 2088
 2089
 2090
 2091
 2092
 2093
 2094
 2095
 2096
 2097
 2098
 2099
 2100
 2101
 2102
 2103
 2104
 2105
 2106
 2107
 2108
 2109
 2110
 2111
 2112
 2113
 2114
 2115
 2116
 2117
 2118
 2119
 2120
 2121
 2122
 2123
 2124
 2125
 2126
 2127
 2128
 2129
 2130
 2131
 2132
 2133
 2134
 2135
 2136
 2137
 2138
 2139
 2140
 2141
 2142
 2143
 2144
 2145
 2146
 2147
 2148
 2149
 2150
 2151
 2152
 2153
 2154
 2155
 2156
 2157
 2158
 2159
 2160
 2161
 2162
 2163
 2164
 2165
 2166
 2167
 2168
 2169
 2170
 2171
 2172
 2173
 2174
 2175
 2176
 2177
 2178
 2179
 2180
 2181
 2182
 2183
 2184
 2185
 2186
 2187
 2188
 2189
 2190
 2191
 2192
 2193
 2194
 2195
 2196
 2197
 2198
 2199
 2200
 2201
 2202
 2203
 2204
 2205
 2206
 2207
 2208
 2209
 2210
 2211
 2212
 2213
 2214
 2215
 2216
 2217
 2218
 2219
 2220
 2221
 2222
 2223
 2224
 2225
 2226
 2227
 2228
 2229
 2230
 2231
 2232
 2233
 2234
 2235
 2236
 2237
 2238
 2239
 2240
 2241
 2242
 2243
 2244
 2245
 2246
 2247
 2248
 2249
 2250
 2251
 2252
 2253
 2254
 2255
 2256
 2257
 2258
 2259
 2260
 2261
 2262
 2263
 2264
 2265
 2266
 2267
 2268
 2269
 2270
 2271
 2272
 2273
 2274
 2275
 2276
 2277
 2278
 2279
 2280
 2281
 2282
 2283
 2284
 2285
 2286
 2287
 2288
 2289
 2290
 2291
 2292
 2293
 2294
 2295
 2296
 2297
 2298
 2299
 2300
 2301
 2302
 2303
 2304
 2305
 2306
 2307
 2308
 2309
 2310
 2311
 2312
 2313
 2314
 2315
 2316
 2317
 2318
 2319
 2320
 2321
 2322
 2323
 2324
 2325
 2326
 2327
 2328
 2329
 2330
 2331
 2332
 2333
 2334
 2335
 2336
 2337
 2338
 2339
 2340
 2341
 2342
 2343
 2344
 2345
 2346
 2347
 2348
 2349
 2350
 2351
 2352
 2353
 2354
 2355
 2356
 2357
 2358
 2359
 2360
 2361
 2362
 2363
 2364
 2365
 2366
 2367
 2368
 2369
 2370
 2371
 2372
 2373
 2374
 2375
 2376
 2377
 2378
 2379
 2380
 2381
 2382
 2383
 2384
 2385
 2386
 2387
 2388
 2389
 2390
 2391
 2392
 2393
 2394
 2395
 2396
 2397
 2398
 2399
 2400
 2401
 2402
 2403
 2404
 2405
 2406
 2407
 2408
 2409
 2410
 2411
 2412
 2413
 2414
 2415
 2416
 2417
 2418
 2419
 2420
 2421
 2422
 2423
 2424
 2425
 2426
 2427
 2428
 2429
 2430
 2431
 2432
 2433
 2434
 2435
 2436
 2437
 2438
 2439
 2440
 2441
 2442
 2443
 2444
 2445


【図16】

Fig. 16

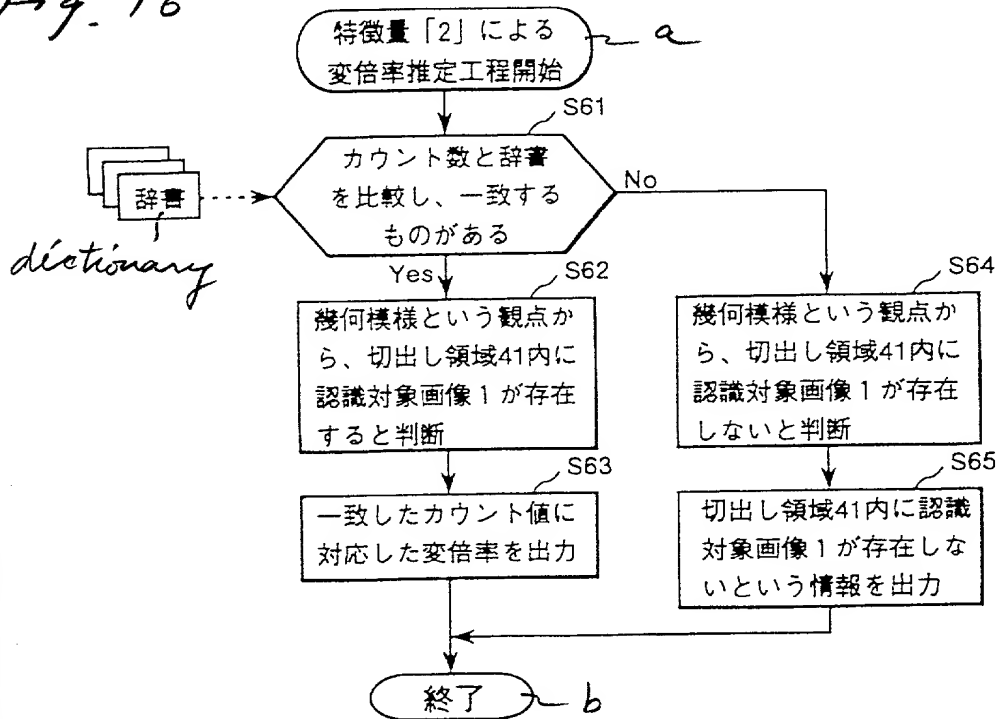


【図17】

Fig. 17

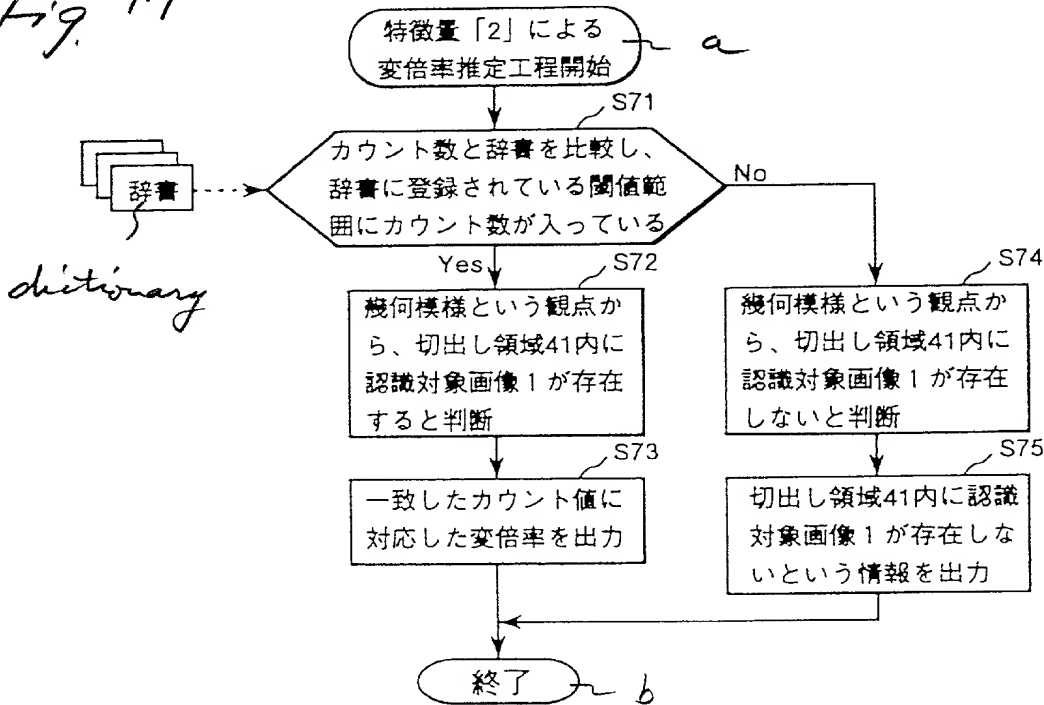


【図 18】


Fig. 18

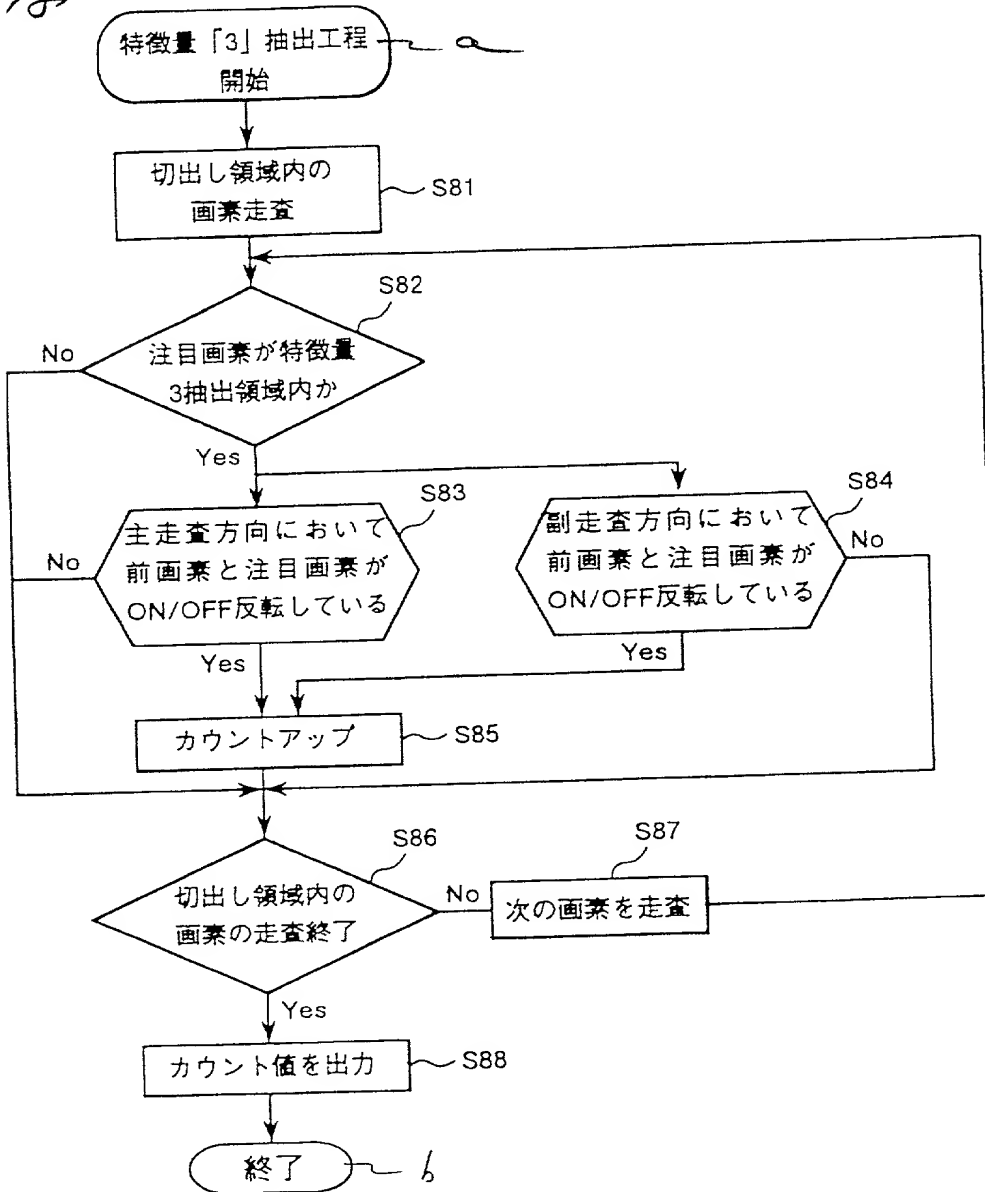


006395-09100

~~Fig. 19~~ Fig. 19

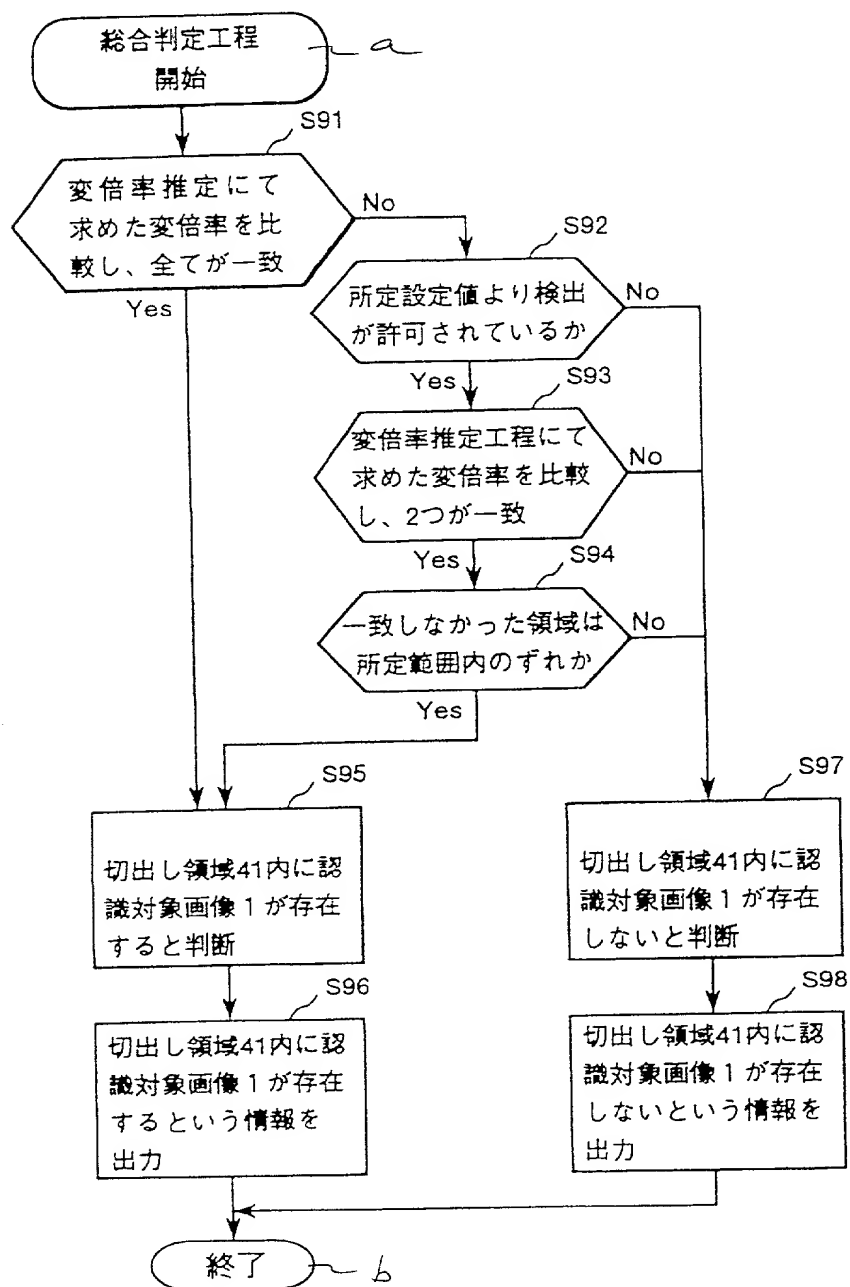

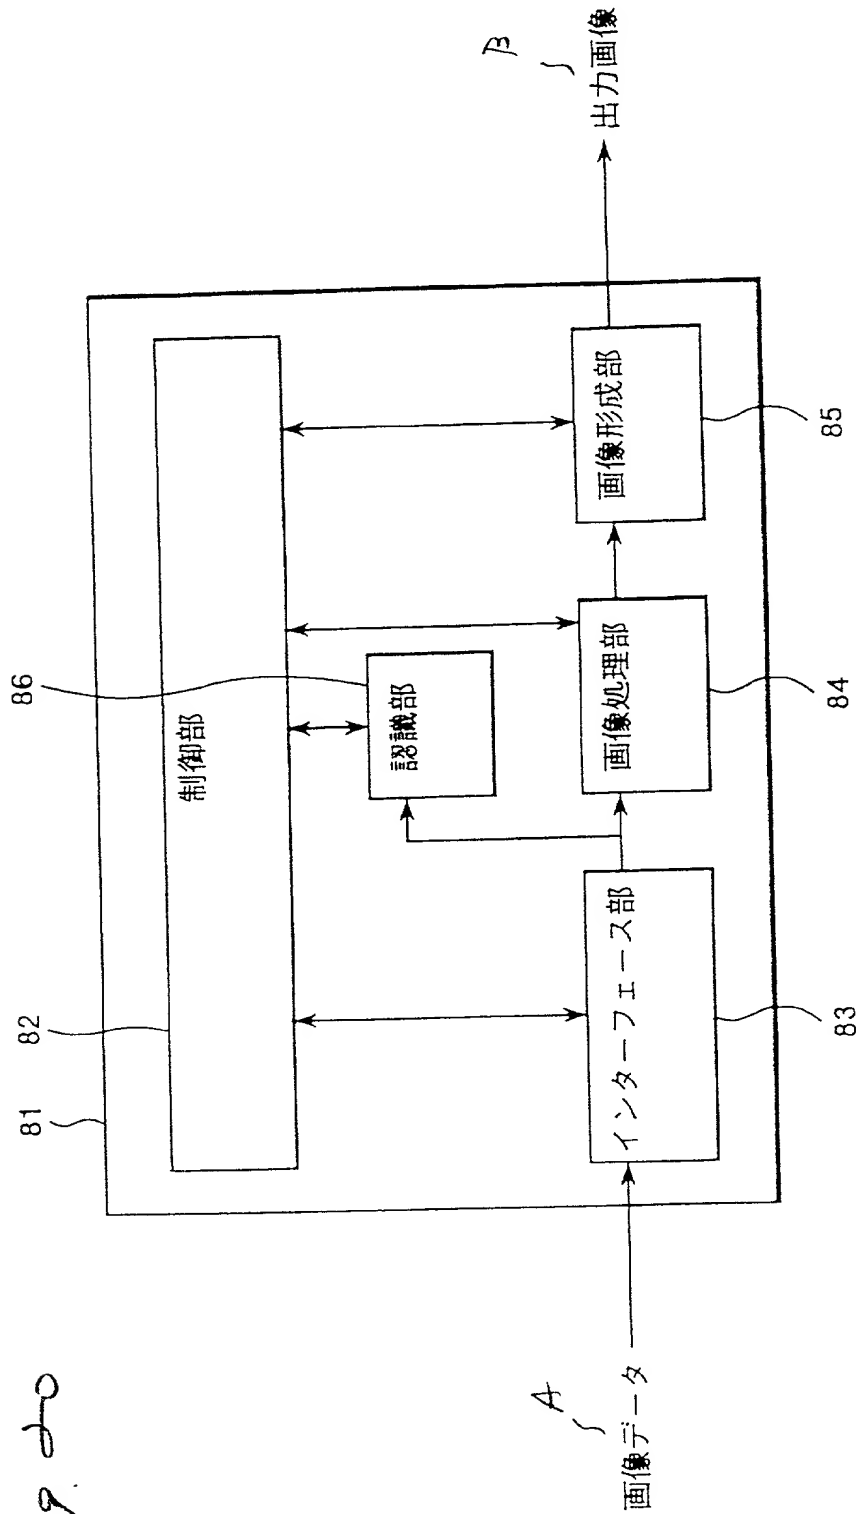
~~【图 20】~~

【図2-1】 Fig. 2-1

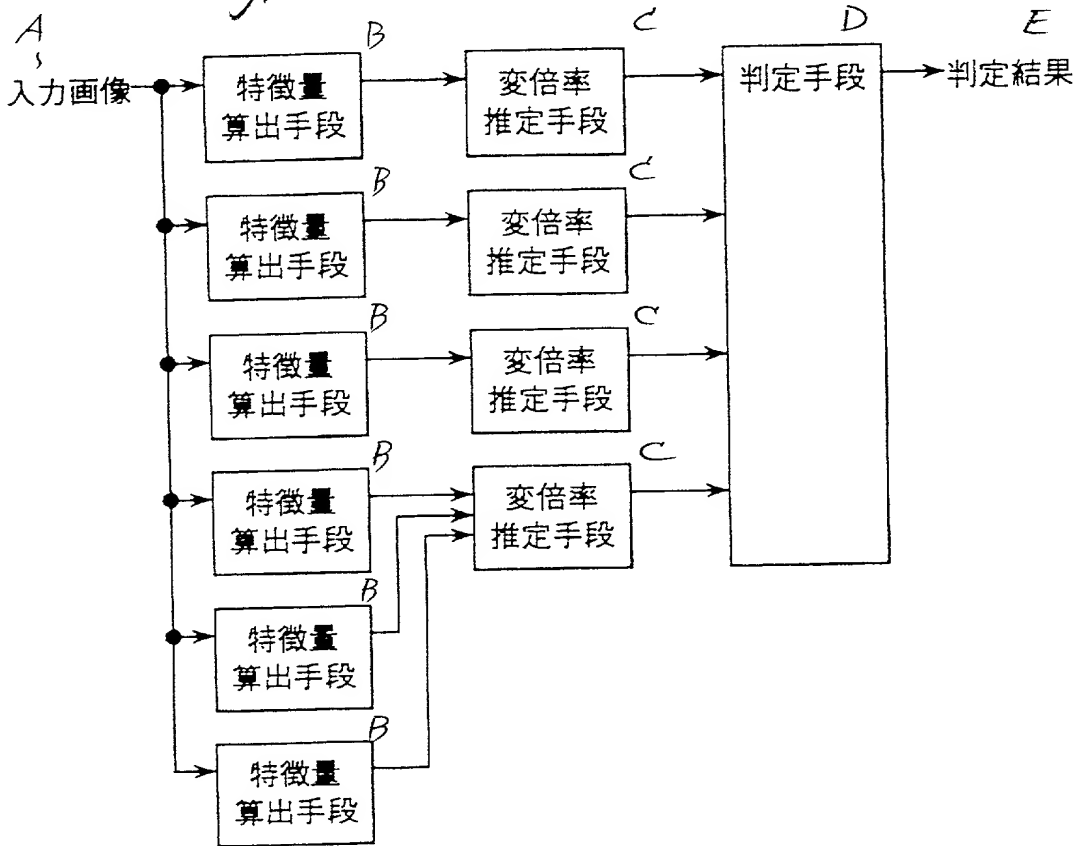

0953362-091100

【図22】 Fig. 22

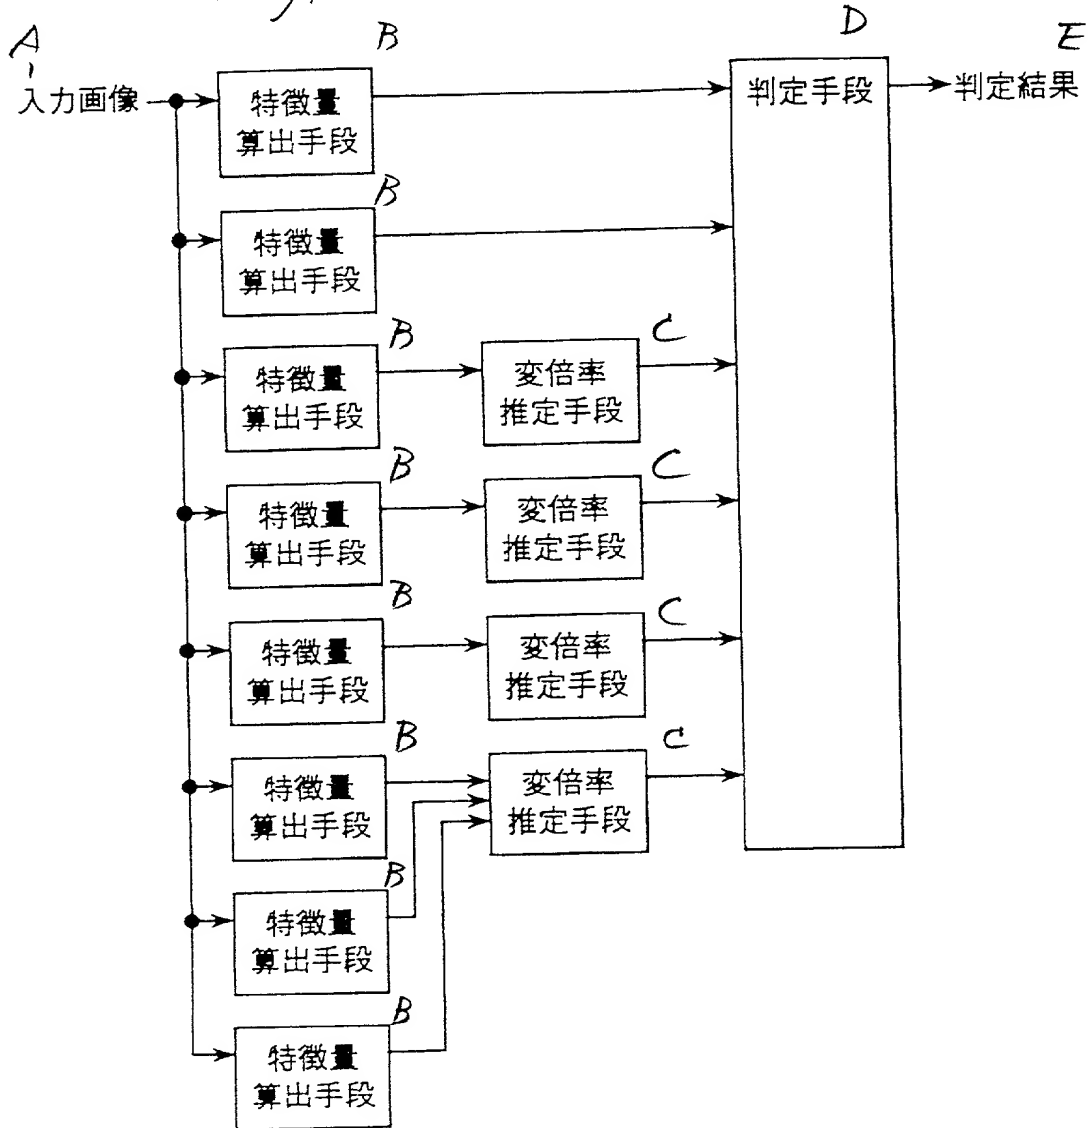

006395-09100

COMBINED DECLARATION FOR PATENT APPLICATION AND POWER OF ATTORNEY

U.S. DEPARTMENT OF COMMERCE
Patent and Trademark Office

ATTORNEY DOCKET NO.: XXXXX-XXXX

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name,

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

[TITLE OF THE INVENTION]
IMAGE PROCESSING SYSTEM AND METHOD, AND IMAGE FORMING APPARATUS

the specification of which:

is attached hereto; or

was filed as United States application Serial No. _____ on _____ and was amended on _____ (if applicable); or

was filed as PCT international application Number _____ on _____ and was amended under PCT Article 19
on _____ (if applicable).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose to the U.S. Patent and Trademark Office information which is material to the patentability of claims presented in this application in accordance with Title 37, Code of Federal Regulations, §1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, §119(a)-(d) or §365(b) of any foreign application(s) for patent or inventor's certificate or §365(a) of any PCT international application(s) designating at least one country other than the United States of America listed below and have also identified below any foreign application(s) for patent or inventor's certificate or any PCT international application(s) designating at least one country other than the United States of America filed by me on the same subject matter having a filing date before that of the application(s) of which priority is claimed:

PRIOR FOREIGN APPLICATION(S):

COUNTRY (if PCT, indicate PCT)	APPLICATION NUMBER	DATE OF FILING (day, month, year)	PRIORITY CLAIMED
Japan	P. 2000-006395	14/January/2000	<input checked="" type="checkbox"/> Yes <input type="checkbox"/> No
			<input type="checkbox"/> Yes <input type="checkbox"/> No
			<input type="checkbox"/> Yes <input type="checkbox"/> No
			<input type="checkbox"/> Yes <input type="checkbox"/> No

Combined Declaration For Patent Application and Power of Attorney - (Continued)
(includes Reference to PCT International Applications)

ATTORNEY DOCKET NO.: XXXXX-XXXX

I hereby claim the benefits under Title 35, United States Code §119(e) of any United States provisional application(s) listed below.

U.S. PROVISIONAL APPLICATIONS

U.S. PROVISIONAL APPLICATION NO.	U.S. FILING DATE

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) or §365(c) of any PCT international application(s) designating the United States of America that is/are listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in that/those prior application(s) in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose to the U.S. Patent and Trademark Office all information known to me to be material to the patentability of claims presented in this application in accordance with Title 37, Code of Federal Regulations, §1.56 which became available between the filing date of the prior application(s) and the national or PCT international filing date of this application:

PRIOR U.S. APPLICATIONS OR PCT INTERNATIONAL APPLICATIONS DESIGNATING THE U.S. FOR BENEFIT:

U.S. APPLICATIONS		STATUS (Check One)		
U.S. APPLICATION NO.	U.S. FILING DATE	PATENTED	PENDING	ABANDONED

POWER OF ATTORNEY: As a named inventor, I hereby appoint the registered practitioners of Morgan, Lewis & Bockius LLP included in the Customer Number provided below to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith, and direct that all correspondence be addressed to that Customer Number.

Customer Number: 009629

Direct Telephone Calls To:
(name and telephone number)

Robert J. Gaybrick
202-467-7501

Combined Declaration For Patent Application and Power of Attorney - (Continued)
(includes Reference to PCT International Applications)

ATTORNEY DOCKET NO.: XXXXX-XXXX

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

FULL NAME OF SOLE OR FIRST INVENTOR	Manabu AKAMATSU	
RESIDENCE & CITIZENSHIP	Kanagawa, Japan	COUNTRY OF CITIZENSHIP Japan
POST OFFICE ADDRESS	c/o Fuji Xerox Co., Ltd., 2274, Hongo, Ebina-shi, Kanagawa, Japan	
FIRST OR SOLE INVENTOR'S SIGNATURE	Manabu Akamatsu	DATE August 22, 2000
FULL NAME OF SECOND INVENTOR	Kenichi TAKAHASHI	
RESIDENCE & CITIZENSHIP	Kanagawa, Japan	COUNTRY OF CITIZENSHIP Japan
POST OFFICE ADDRESS	c/o Fuji Xerox Co., Ltd., 2274, Hongo, Ebina-shi, Kanagawa, Japan	
SECOND INVENTOR'S SIGNATURE	Kenichi Takahashi	DATE August 22, 2000
FULL NAME OF THIRD INVENTOR	Yoshinori AWATA	
RESIDENCE & CITIZENSHIP	Kanagawa, Japan	COUNTRY OF CITIZENSHIP Japan
POST OFFICE ADDRESS	c/o Fuji Xerox Co., Ltd., 2274, Hongo, Ebina-shi, Kanagawa, Japan	
THIRD INVENTOR'S SIGNATURE	Yoshinori Awata 8/22/2000 Yoshinori Awata	DATE August 22, 2000

Listing of Inventors Continued on attached page(s) [] Yes [X] No